

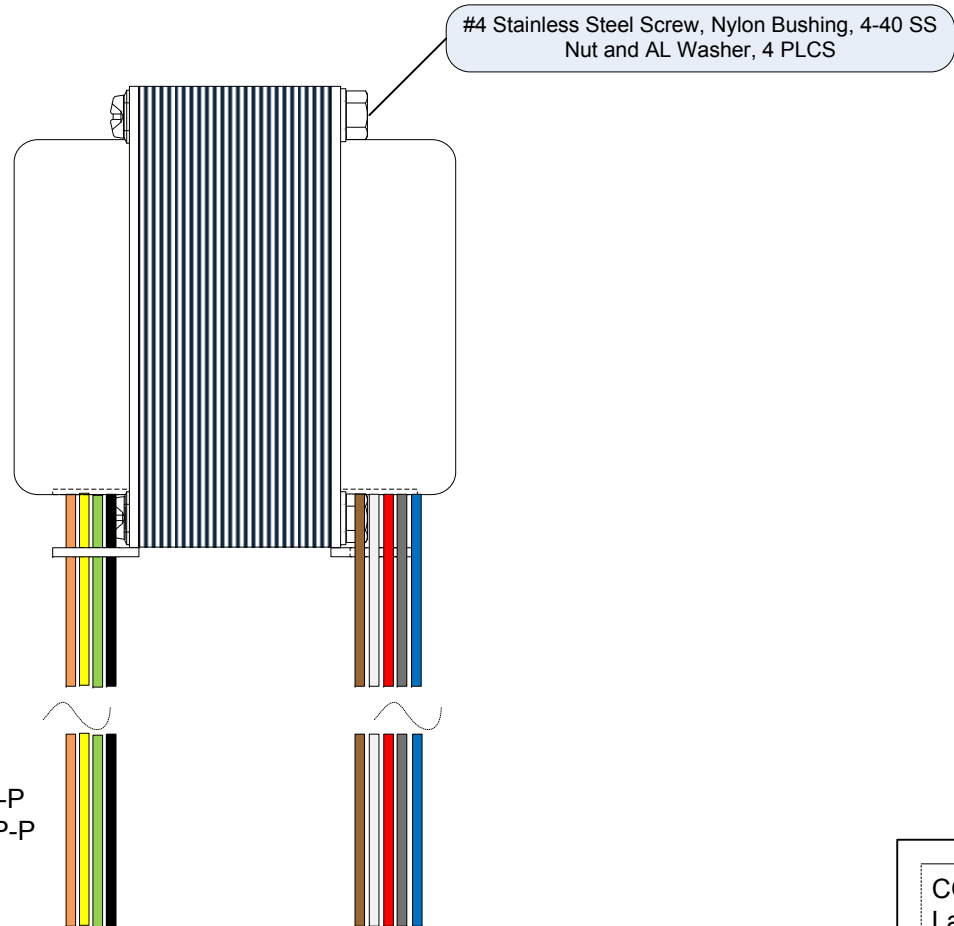




OT20PP USA HC87 Version

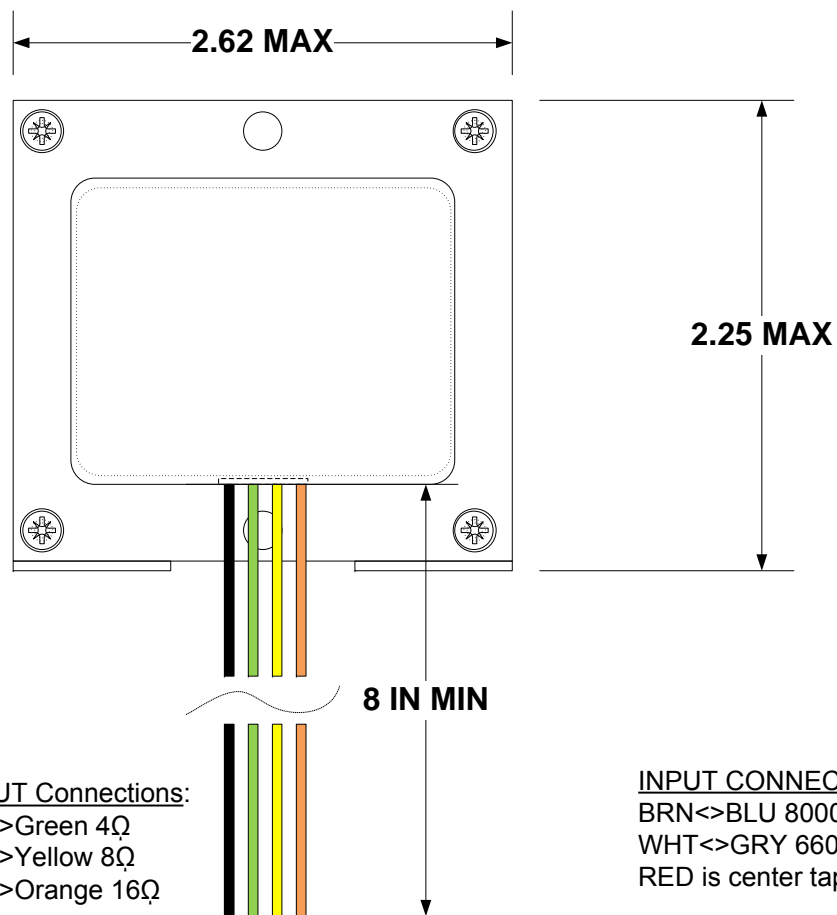

INPUT CONNECTIONS:
 BRN<->BLU 8000 ohm P-P
 WHT<->GRY 6600 ohm P-P
 RED is center tap

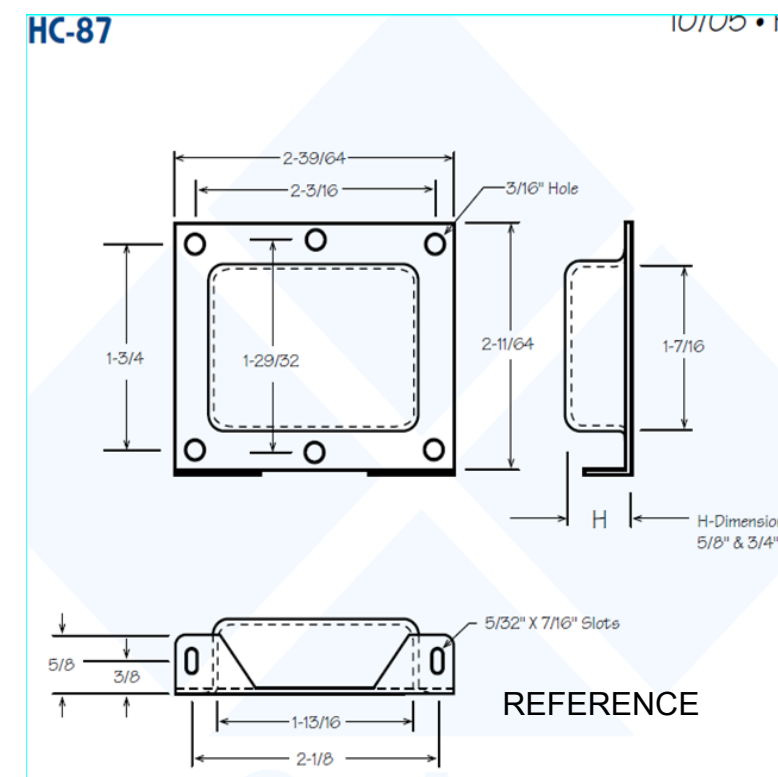

Transformer Schematic OT20PP USA

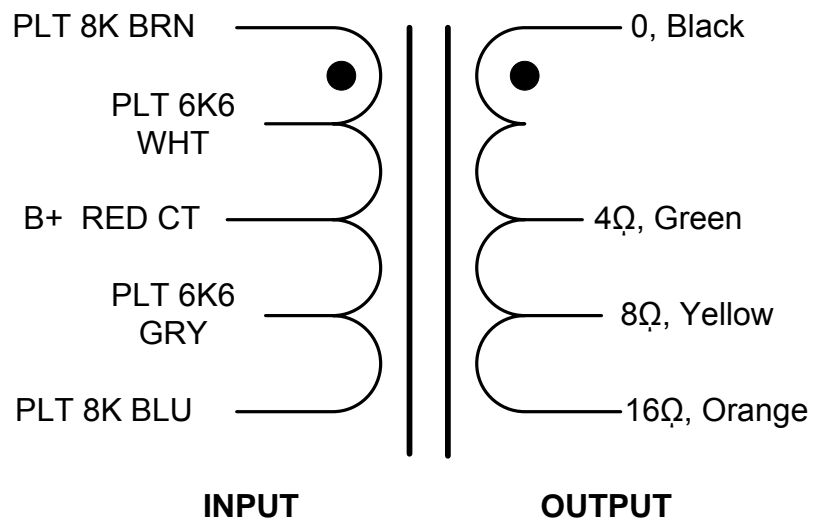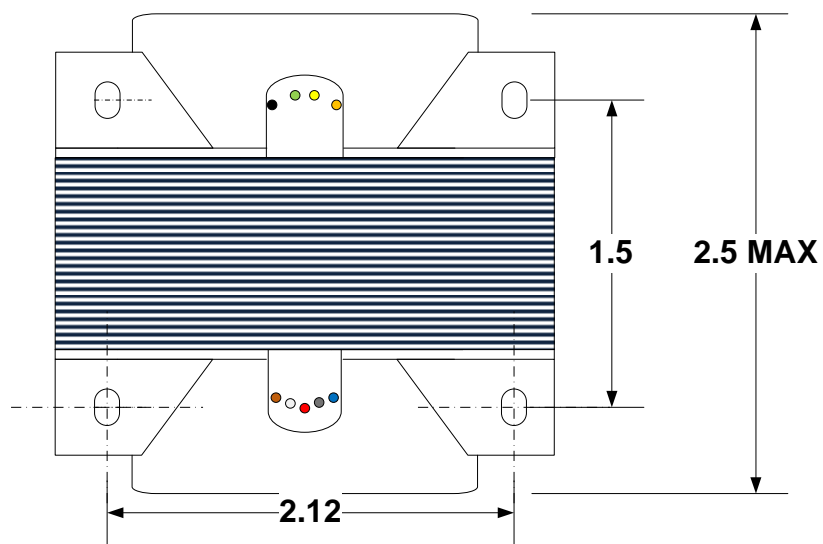


CONSTRUCTION DETAILS-

Laminations: 29M6 x EI-87
 Bobbin: EI-87 7/8 x 1 window, Nylon Glass Reinforced UL94V-0
 Magnet Wire: MW80 155C or higher
 Varnish- Class B 130C
 Tapes: 3M #56 (inner) & #79 (outer wrap)
 Covers: Bahr's USA 22GA Zinc Plated, HC-87
 Hardware: Non-Magnetic

PERFORMANCE

Operating Voltage 450Vdc Maximum
 Output Power: 25VA Maximum
 Designed Operating Frequency (+/-1dB): 82 to 15000 Hz
 HiPot Test Ratings 1000Vac minimum
 Input Impedances: 6600 or 8000 Ohms
 Output Impedances: 4,8 and 16 Ohms
 Application: 12 to 25W Push-Pull Amplifiers EL84 or 6V6



OT20PP USA in HC-87 Covers

10/03/2013

SIZE
B

FSCM NO

DWG NO

REV

OT20PP USA HC87

A

M.P.S.

SCALE

1 : 1

SHEET

Page 1
1 OF 1