



OT5PP Standard

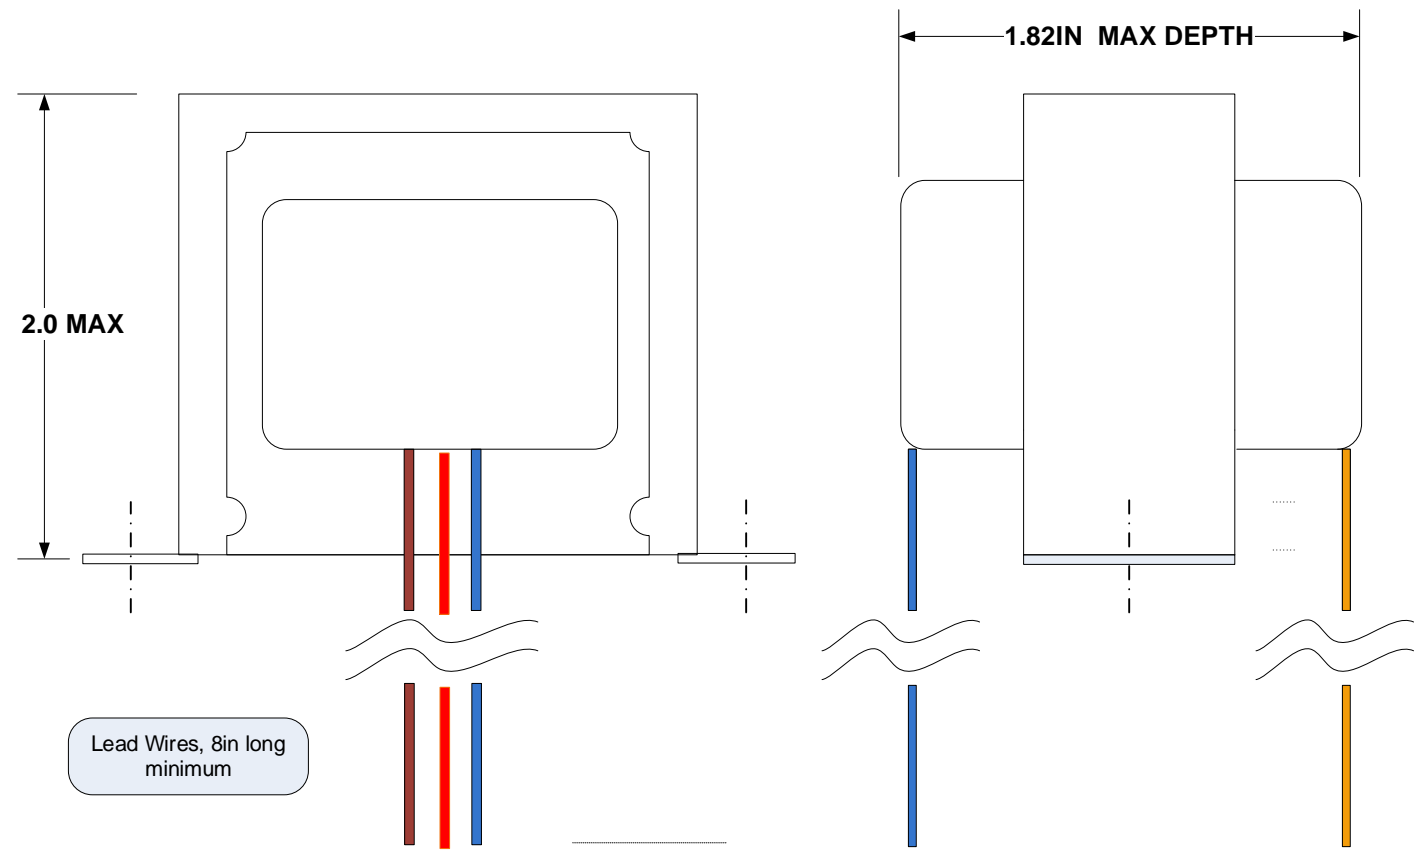


INPUT CONNECTIONS:
BRN-RED-BLU 22AWG


OUTPUT CONNECTIONS:
BK(0)-GN(4)-YL(8)-OR(16Ω)
22AWG

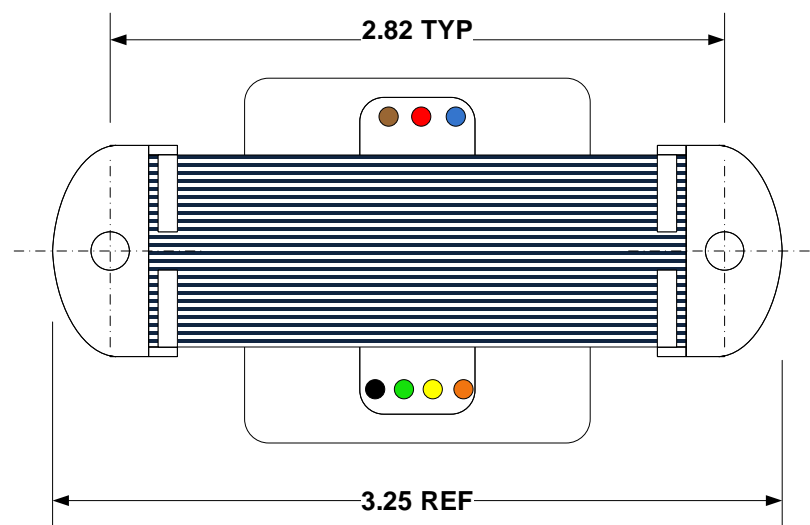

SCHEMATIC OT5PP STANDARD

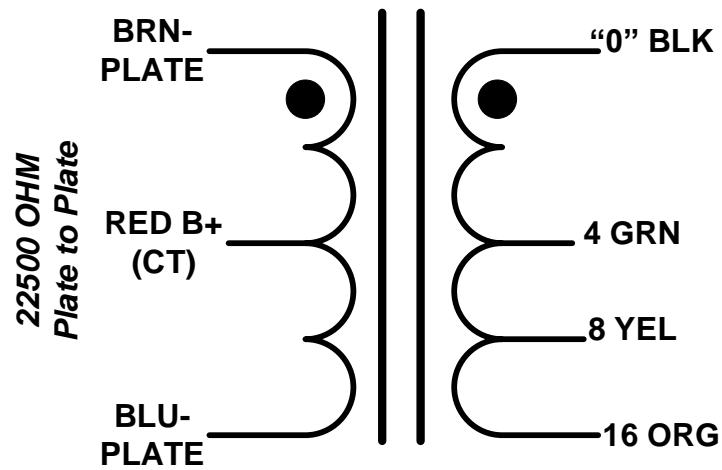

40 Henries Minimum
@1VAc 100Hz

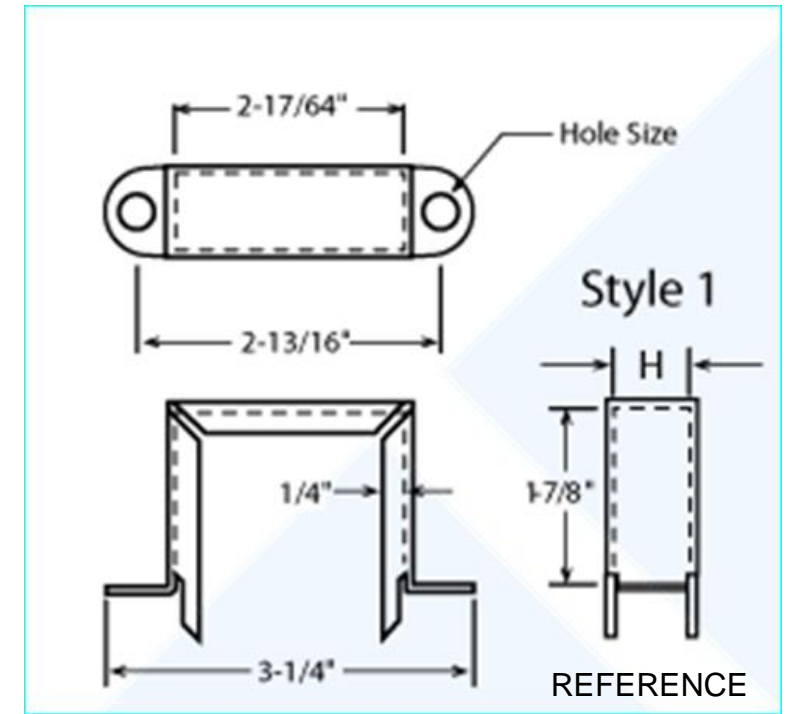

CONSTRUCTION DETAILS-

Laminations: 29M6 x EI-75 3/4 IN STACK
 Bobbin: EI-75 3/4 IN window, Rynite UL94V-0
 Magnet Wire: MW80 155C or higher
 Varnish- Class B 130C
 Tapes: 3M #56 (inner) & #20 (outer wrap)
 Covers: Bahr's USA ETC 3/4IN Frame and Shield, Fully Shielded Construction
 With SH200 x 17/32DP EI75 coil covers in Tin Electroplate

PERFORMANCE

Operating Voltage 500Vac Maximum
 HiPot Test Ratings 1000Vac minimum
 Input Inductance: 40H Minimum at 100HZ 1Vac

Application: 0.5 to 5W Push-Pull Amplifiers



OT5PP Standard

7/11/2020	SIZE B	FSCM NO	DWG NO OT5PP STANDARD	REV A
M.P.S.	SCALE 1 : 1	SHEET		Page 1 1 OF 1